

GLC™ X Smart Controller and Auto Lube™ App



Auto Lube Under Control, On Demand



Drive More Productivity

The powerful, easy-to-use Graco GLC X automatic lubrication controller captures more information so operators, technicians and managers can make faster, smarter decisions. Paired with the intuitive Auto Lube app, users can monitor system performance and make adjustments with incredible speed, precision and freedom from their personal mobile device.

PROVEN QUALITY. LEADING TECHNOLOGY.



Indoor/Outdoor Mountable (IP69K)

Designed to withstand all the elements, including high-pressure washes and inclement weather encountered at the harshest and dirtiest sites.

Easy-to-Read Screen

High-contrast screen features text codes, faults and other data clearly in any ambient light without distracting operators.

Real-Time System Reporting

Program and display a wide range of customisable functions – including lubrication intervals, pressure limits, lubricant levels and more.

Smart Device and Mobile App

With the Auto Lube™ app, monitor lubrication levels, configure settings, track history and share important diagnostics.



Universal Compatibility

One controller for all your lubrication systems simplifies training and inventory.

Quick Technical Information Access

Scan this QR code with ease for access to manuals, guides, video tutorials and more.



Active Current Protection

9-30 VDC, 10 amp continuous power supply protects grease pumps from overcurrent and entire system from misfires, electrical shorts and surges.

► Typical Applications

- Heavy construction
- Mining
- Other off-road mobile equipment

► Technical Specifications

Inputs/Outputs	4/2
Power Source	9-30 VDC
Modes	Pressure/Cycle/Timer
Dimensions	92 mm (3.62 in) wide x 169 mm (6.66 in) high x 50 mm (1.98 in) deep
Operating Temperature Range	-30°C to 70°C (-22°F to 158°F)
Protection Grade	IP69K
Manual	3A7031

► Ordering Information

Controllers


Part Number	Description
26A855	GLC X controller with 20-ft (6-m) cable
26A814	GLC X controller

Accessories

Part Number	Description
26A853	GLC X pump simulator
26A882	GLC X 6 m (20 ft) cable
26A883	GLC X to Compact Dyna-Star® 1-m (3-ft) cable
26A888	14-pin mating connector kit

PRODUCTIVITY LEADS TO PROFITABILITY

Help your crews work faster and minimise downtime by simplifying their everyday lubrication tasks. Designed for today's modern personal mobile device user, the Auto Lube app is intuitive and easy to learn for users in the field. They can view historical performance charts, access support and share information with a tap or swipe.

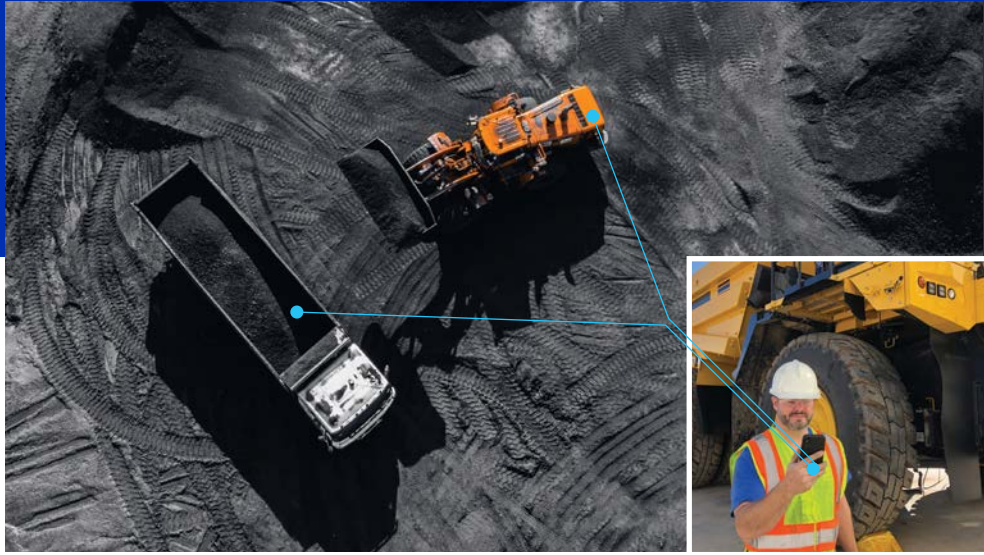

Workers simply need to be within Bluetooth range to perform maintenance tasks quicker and easier – directly from their mobile devices.




Robust and durable despite its small size, the new controller is built to withstand the rigours of any environment, from industrial plants to heavy-duty construction sites.

The GLC X controller is Bluetooth enabled, so maintenance crews and operators can quickly monitor a wide range of lubrication metrics, including levels, pressure, configurations and more.




Control Lubrication Profile Configurations

- Customise profiles for equipment and end users
- Quickly and easily assign a Lube Profile Configuration with a GLC X Controller

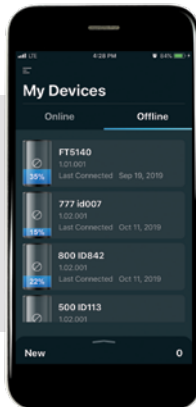

Manage Devices

- Connect via Bluetooth to get an instant status
- Review last-known state on any historical device

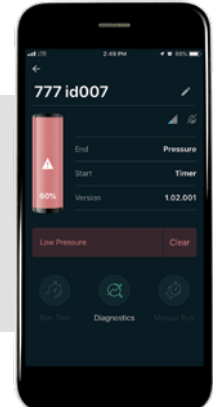

Communicate in Real Time

- See, control, check and clear alarms
- Complete a manual run
- Review and share system history



Download the **Graco Auto Lube** app from Google Play or the App Store (iOS) and perform all controller functions from the convenience of a smartphone or tablet.



ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco Distribution BV
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7 1029 Zhongshan Road
South Huangpu District
Shanghai 200011
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd. India Liaison
Office
Room 432, Augusta Point Regus
Business Centre 53 Golf Course Road
Gurgaon, Haryana India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
38, Samsung 1-ro 1-gil
Hwaseong-si, Gyeonggi-do,
18449
Republic of Korea
Tel: 82 31 8015 0961
Fax: 82 31 613 9801

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.



Europe
+32 89 770 700
FAX +32 89 770 777
WWW.GRACO.COM